


SONEX

PYRAMID PANELS

Sound Absorbing and Noise Blocking

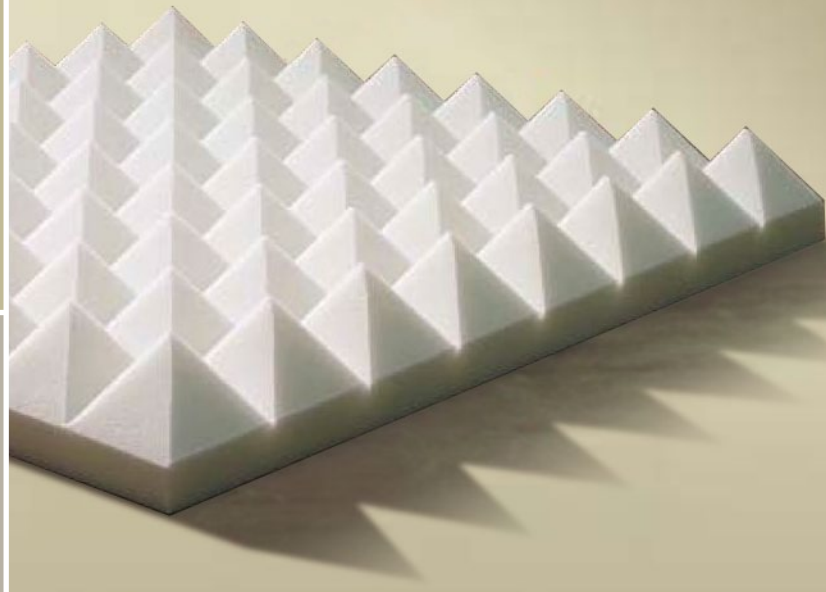

EXCELLENT ACOUSTIC CONTROL

BOLD, GEOMETRIC PATTERN

PANEL SIZE OF 24" X 24", 2" OR 4" THICKNESS

PHYSICAL DATA

Material	Open-cell melamine-based foam
Density	0.5 to 0.7 lbs./cu. ft. (ASTM D3574-77)
Long-Term Service Temperature	302°F
Fire Resistance	Class 1 per ASTM E 84 (all finishes) Meets UL 1715 (natural)
Flame Spread per ASTM E 84	Natural: 5 Painted: 10
Smoke Density per ASTM E 84	Natural: 50 Painted: 10
Microbial Growth	Passes UL 181, section 11
Fungus Resistance Rating	0 per ASTM G21
Finishes	Natural (white and light grey), painted



Helps reduce noise, unwanted sounds and reverberation in many types of interior environments

SOUND ABSORPTION

Finish	Thickness	Coefficients per ASTM C423-90a						NRC	Mounting
		125Hz	250Hz	500Hz	1kHz	2kHz	4kHz		
Natural (white and grey)	2"	0.07	0.25	0.60	0.94	0.97	1.08	0.70	B
	3"	0.09	0.37	0.81	1.01	1.03	1.07	0.80	B
	4"	0.18	0.44	0.96	1.14	1.18	1.19	0.95	B

SOUND [ISOLATION] COMPANY

2900 WESTINGHOUSE BLVD. SUITE 106
 CHARLOTTE, NC 28273
 704 / 504 / 1127 PH
 704 / 504 / 1115 FX
 888 / 666 / 5090 TOLL FREE
 WWW.SOUNDISOLATIONCOMPANY.COM

Solve your noise problem. Call now to get it right the first time 888-666-5090

Do you need expert design, product selection and installation instruction? Sound Isolation Company has the experience you need for a partnership that will work. Call Now 888-666-5090