


PRIVACY

ACOUSTICAL PIPE WRAP



EASY TO CUT, WRAP & INSTALL WITH LAG TAPE
 CLASS A FLAMMABILITY RATING PER ASTM E-84
 STANDARD ROLL IS 48" WIDE X 30' LONG

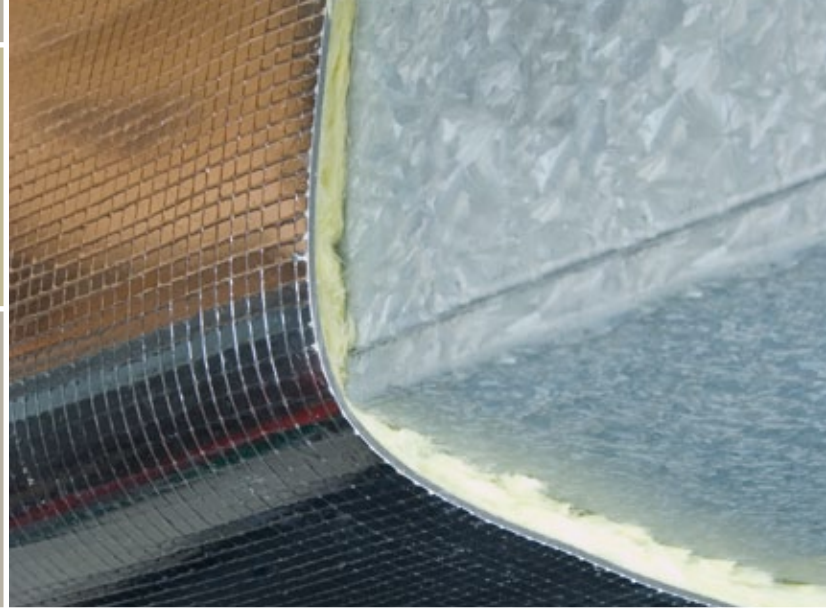

PRIVACY ACOUSTICAL PIPE WRAP

A composite material featuring a flexible one pound per square foot reinforced foil-faced loaded vinyl noise barrier bonded to a 1" thick quilted fiberglass sound absorber. Used to wrap noisy pipes, ducts, valves and fan housings.

Application:

Typically used to wrap noisy pipes and ducts to block the noise that transmits through the walls of the pipe or duct as air or other contents move through it. The quilted fiberglass decoupler improves the performance of the noise barrier as well as to provide sound absorption and thermal insulation around the pipe or ductwork.

The reinforced foil facing on the barrier readily accepts a matching lag tape for easy installation and also serves as a protective jacket for indoor or outdoor applications.

Sound Transmission Loss: per ASTM E-90 & E 413

PRODUCT	OCTAVE BAND (HZ)						STC
	125	250	500	1000	2000	4000	
PIPE WRAP	15	18	22	27	32	37	27
PIPE WRAP 1"	18	18	23	30	39	46	29
PIPE WRAP 2"	19	20	23	33	44	53	30

Other products to combat HVAC noise problems.



Privacy Duct Silencer



Privacy Replacement Duct

Product Data:

Nominal Thickness: 1"
 Standard Size: 48" wide x 30' long
 Weight:..... 1.22 lb psf.
 Temperature Range: -20° to +350° F
 "R" Factor: 4.0
 Flammability: Class A (or 1) Per ASTM E-84
 Smoke Density Index:..... 19.5
 Flame Spread Index:..... 12.5

SOUND [ISOLATION] COMPANY

2900 WESTINGHOUSE BLVD. SUITE 106
 CHARLOTTE, NC 28273
 704 / 504 / 1127 PH
 704 / 504 / 1115 FX
 888 / 666 / 5090 TOLL FREE
 WWW.SOUNDISOLATIONCOMPANY.COM

www.soundisolationcompany.com